

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 June 2004 (17.06.2004)

PCT

(10) International Publication Number
WO 2004/051137 A1

(51) International Patent Classification⁷: F16S 3/04,
A01G 9/12, 17/14, E04H 17/20

(21) International Application Number:
PCT/AU2003/001595

(22) International Filing Date: 1 December 2003 (01.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002952991 29 November 2002 (29.11.2002) AU

(71) Applicant and

(72) Inventor: SOMERVILLE, Declan [AU/AU]; 3 Whitney
Street, Cheltenham, South Australia 5014 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(74) Agent: LESICAR PERRIN; 49 Wright Street, Adelaide,
South Australia 5000 (AU).

Published:

— with international search report

[Continued on next page]

(54) Title: GARDEN EXTRUSION

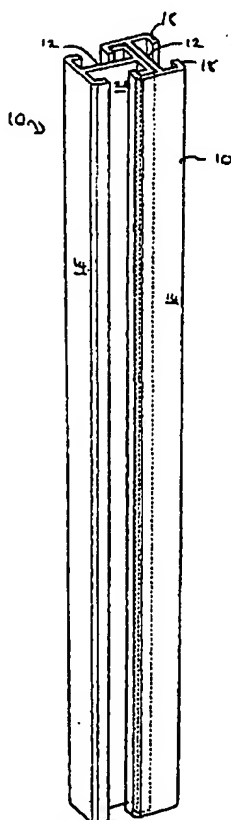

(57) Abstract: An extrusion (10) including a central wall portion (12) and a surrounding perimeter portion (14, 18) whereby the central wall portion (12) divides the extrusion (10) into opposing chambers, said perimeter portion (14, 18) having a respective opening therein into each of said chambers and each said chamber being able to have a perimeter portion (14, 18) of a further extrusion (10) locked thereinto to form an interlocked unit.

WO 2004/051137 A1

BEST AVAILABLE COPY